

Louisville Metro Air Pollution Control District
PM_{2.5} Monitoring Report
December 2019

This report summarizes PM_{2.5} data collected by Federal Reference Method (FRM) and Federal Equivalent Method (FEM) instruments. Measurements are reported as 24-hour averages in micro-grams per cubic meter (µg/m³). The data are subject to further quality assurance checks and are not final.

PM_{2.5} Monthly Data Summary for November 2019

Site Name	Maximum		Minimum		Sample	Monthly
	Conc.	Date	Conc.	Date	Recovery	Average
Firearms Training *	22.7	11/16/19	5.2	11/27/19	NA	10.8
Durrett Lane	27.7	11/17/19	5.7	11/27/19	NA	12.5
Cannons Lane	23.3	11/18/19	5.3	11/30/19	NA	11.0
Watson Lane	27.0	11/15/19	5.1	11/30/19	NA	11.4
Overall	27.7	11/17/19	5.1	11/30/19	NA	11.4

* Firearms Training replaced Southwick on 1/5/2018


PM_{2.5} Monthly Averages Tracking Table for 2009-2019

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Months >Annual Standard
2009	14.6	11.1	11.3	9.3	10.3	13.9	13.1	12.6	12.1	8.9	13.8	12.9	0
2010	13.3	16.3	12.2	12.2	11.0	14.1	16.0	16.4	11.0	17.0	12.6	13.7	4
2011	15.2	10.6	9.7	8.6	12.1	14.1	19.7	16.2	11.5	9.0	7.6	9.9	3
2012	8.9	9.5	9.2	7.2	11.7	10.9	12.5	11.9	8.6	7.3	13.1	9.6	0
2013*	10.5	10.0	8.5	7.6	8.8	11.6	10.1	12.7	11.9	9.3	7.2	10.7	0
2014	7.5	14.3	11.7	9.6	10.7	14.0	16.4	13.6	9.9	7.9	9.8	12.4	5
2015	10.9	11.0	11.3	6.9	10.2	10.1	13.1	10.0	9.7	7.5	8.5	7.7	1
2016	8.9	9.5	6.4	7.1	7.1	8.5	7.4	8.9	9.3	8.1	11.3	9.3	0
2017	7.7	8.1	6.6	5.8	7.2	6.7	11.3	9.3	8.5	6.8	10.5	10.7	0
2018	9.7	9.6	8.4	6.5	11.0	10.4	11.9	11.7	7.2	7.1	12.9	11.0	1
2019 **	11.0	11.0	11.1	8.2	9.6	8.2	10.6	8.8	10.4	8.2	11.4		0
Average	11.3	11.7	11.2	9.4	11.7	13.4	15.5	15.4	12.1	9.8	11.0	11.2	

*The new PM_{2.5} standard of 12 µg/m³ became effective on March 18, 2013

** 2019 Data from continuous FEM Instruments

PM_{2.5} Monthly Averages 5-Year Trend

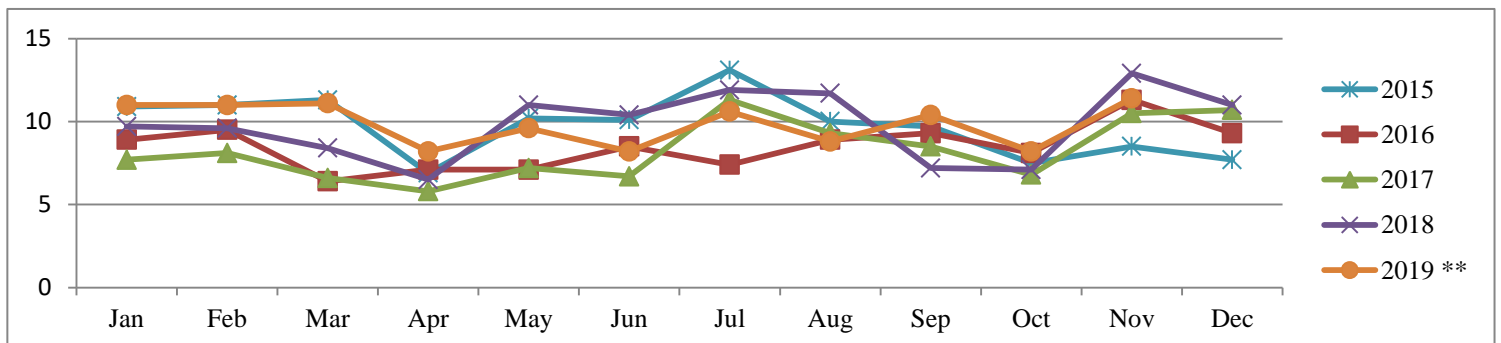

National Ambient Air Quality Standards (NAAQS):

National Ambient Air Quality Standards consist of primary and secondary standards. The primary standards define levels of air quality which EPA judges are necessary, with an adequate margin of safety, to protect the public health. The secondary standards define levels of air quality which EPA judges necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant. For PM_{2.5} the levels of the primary and secondary standards are the same.

National Ambient Air Quality Standard for PM_{2.5} - Annual Standard:

The annual standard is designed to provide an appropriate level of protection from long-term exposure to PM_{2.5}. The standard is met when the annual design value is less than or equal to 12 µg/m³. The standard changed from 15 µg/m³ to 12 µg/m³ on March 18, 2013. The annual design value is calculated by averaging the annual means of 3 consecutive complete years of air quality data. The table below compares data collected from 2013 through year-to-date 2019 to the PM_{2.5} annual standard.

PM_{2.5} Annual Means and Annual Design Values

Site Name	Annual Means µg/m ³							Annual Design Values				
	2013	2014	2015	2016	2017	2018	2019	2013-2015	2014-2016	2015-2017	2016-2018	2017-2019
Firearms Tr*	12.3	11.2	10.4	8.3	8.3	9.5	10.1	11.3	10.0	9.0	8.7	9.3
Durrett Lane	10.2	12.0	10.0	9.2	8.9	10.2	10.2	10.7	10.4	9.4	9.4	9.7
Cannons Lane	11.1	11.0	9.5	7.9	7.9	9.1	9.4	10.5	9.5	8.4	8.3	8.8
Watson Lane	12.5	12.2	10.4	8.4	8.1	10.5	9.8	11.7	10.3	9.0	9.0	9.5

Bold: Design value for Louisville

* Firearms Training replaced Southwick in 2018

National Ambient Air Quality Standard for PM_{2.5} - 24-Hour (Daily) Standard:

The 24-hour standard is designed to provide an appropriate level of protection from short-term exposure to PM_{2.5}. The standard is met when the 24-hour design value is less than or equal to 35 µg/m³. The design value is based on 3 consecutive complete years of air quality data and is calculated by taking the average of the 98th percentile value for each of the 3 years. The 98th percentile value is the 24-hour average out of a year of PM_{2.5} monitoring data below which 98 percent of all 24-hour averages fall. The table below compares data collected from 2013 through year-to-date 2019 to the 24-hour standard for PM_{2.5}.

PM_{2.5} Annual 98th Percentiles and 24-Hour Design Values

Site Name	Annual 98 th Percentile Value µg/m ³							24-Hour Design Values				
	2013	2014	2015	2016	2017	2018	2019	2013-2015	2014-2016	2015-2017	2016-2018	2017-2019
Firearms Tr*	24.0	24.3	22.3	17.0	17.8	23.0	20.4	23.5	21.2	19.0	19.3	20.4
Durrett Lane	20.6	26.0	22.1	18.7	20.7	24.7	20.5	22.9	22.3	20.5	21.4	22.0
Cannons Lane	22.5	23.9	21.7	18.7	17.2	22.2	20.0	22.7	21.4	19.2	19.4	19.8
Watson Lane	23.8	26.2	22.8	16.2	17.7	24.3	20.5	24.3	21.7	18.9	19.4	20.8

Bold: Design value for Louisville

* Firearms Training replaced Southwick in 2018

**Louisville Metro Air Pollution Control District
Air Monitoring Report for Sulfur Dioxide (SO₂)
December 2019**

On June 2, 2010, EPA strengthened the primary National Ambient Air Quality Standard for SO₂. Specifically, EPA replaced the existing annual (30 ppb) and 24-hour (140 ppb) primary standards with a new 1-hour standard set at 75 ppb. The 1-hour standard was set to better protect public health by reducing exposure to high short-term concentrations of SO₂. The new standard took effect August 23, 2010.

Exceedances of the 1-Hour SO₂ Standard:

An exceedance occurs when a measured 1-hour average is greater than 75 ppb. Since up to twenty-four 1-hour averages are recorded each day, multiple exceedances may occur in one day. However, only the maximum 1-hour average (Daily Max) for each day is used in determining if the area is in compliance with the standard. The table below indicates the number of exceedances and the daily maximums reported thus far this year. The data are subject to further quality assurance checks and are not final.

SO₂ Daily Maximums and Exceedances through November 30th

Date	Fire Arms Training		Watson Lane Elementary		Cannons Lane NCore		New Albany Indiana	
	Exceeds	Daily Max	Exceeds	Daily Max	Exceeds	Daily Max	Exceeds	Daily Max
01/08/19		2.0		6.0		2.4		0.8
01/31/19		4.0		1.6		3.9		22.4
02/09/19		4.6		2.5		1.4		4.0
02/14/19		1.6		4.1		1.4		2.2
02/25/19		1.1		1.9		1.4		9.6
02/27/19		2.1		2.3		5.5		2.2
03/07/19		2.2		1.3		6.2		3.2
03/15/19		2.3		0.5		1.2		1.1
03/30/19		1.5		6.8		3.1		1.2
04/02/19		2.5		2.4		2.5		3.8
04/10/19		4.3		7.3		0.9		1.3
04/17/19		1.2		2.4		6.0		1.9
05/17/19		1.7		2.5		2.7		0.5
05/23/19		2.5		9.2		4.0		0.0
05/25/19		1.2		3.3		18.0		-0.1
06/10/19		6.1		0.4		0.6		-0.6
06/12/19		2.3		1.6		1.5		7.3
06/14/19		4.0		4.1		8.3		0.5
06/26/19		1.8		7.0		4.3		-0.1
Totals/Max	0	6.3	0	23.7	0	18.0	0	22.4
99 th Percentile		5.9		14.9		8.9		4.7

NA - Indicates data were not available

Attainment of the SO₂ Standard:

Attainment of the new standard is achieved when the 3-year average of the 99th percentile annual distribution of the daily maxima is less than or equal to 75 ppb. Since this value can be calculated from historical data, the chart below indicates those values based on 2013-2019 data.

SO₂ Annual 99th Percentiles and Annual Design Values

Site Name	Annual 99 th Percentiles (ppb)							Annual Design Values				
	2013	2014	2015	2016	2017	2018	2019	2013-2015	2014-2016	2015-2017	2016-2018	2017-2019
Watson Lane	93	149	54	26	14	16	15	99	76	31	19	15
Fire Arms	37	42	25	16	11	12	6	35	28	17	13	10
Cannons Lane	27	29	19	8	7	8	9	25	19	11	8	8
New Albany	21	44	26	11	8	9	5	30	27	15	9	7

* Design Value calculations are approximations based on preliminary summary data and may differ from official design value calculations