

Louisville Metro Air Pollution Control District
PM_{2.5} Monitoring Report
January 2018

This report summarizes PM_{2.5} data collected by Federal Reference Method (FRM) samplers. Measurements are reported as 24-hour averages in micro-grams per cubic meter (µg/m³). The data are subject to further quality assurance checks and are not final.

PM_{2.5} Monthly Data Summary for December 2017

Site Name	Maximum		Minimum		Sample	Monthly
	Conc.	Date	Conc.	Date	Recovery	Average
Southwick	17.9	12/3/17	4.1	12/6/17	**	10.4
*Durrett Lane	24.4	12/3/17	6.2	12/6/17	**	11.7
Cannons Lane	23.4	12/3/17	2.7	12/6/17	**	10.7
Watson Lane	17.9	12/3/17	3.6	12/6/17	**	10.0
Overall	24.4	12/3/17	2.7	12/6/17	**	10.7

*Durrett Lane replaced Wyandotte on 1/1/2014


**Some data not available at this time

PM_{2.5} Monthly Averages Tracking Table for 2007-2017

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Months >Annual Standard
2007	9.3	12.2	14.9	11.2	18.4	19.9	18.3	22.8	16.9	11.1	12.5	14.1	5
2008	11.8	12.0	11.9	11.6	12.1	11.8	18.1	17.1	17.6	10.6	14.3	9.4	3
2009	14.6	11.1	11.3	9.3	10.3	13.9	13.1	12.6	12.1	8.9	13.8	12.9	0
2010	13.3	16.3	12.2	12.2	11.0	14.1	16.0	16.4	11.0	17.0	12.6	13.7	4
2011	15.2	10.6	9.7	8.6	12.1	14.1	19.7	16.2	11.5	9.0	7.6	9.9	3
2012	8.9	9.5	9.2	7.2	11.7	10.9	12.5	11.9	8.6	7.3	13.1	9.6	0
2013*	10.5	10.0	8.5	7.6	8.8	11.6	10.1	12.7	11.9	9.3	7.2	10.7	1
2014	7.5	14.3	11.7	9.6	10.7	14.0	16.4	13.6	9.9	7.9	9.8	12.4	5
2015	10.9	11.0	11.3	6.9	10.2	10.1	13.1	10.0	9.7	7.5	8.5	7.7	1
2016	8.9	9.5	6.4	7.1	7.1	8.5	7.4	8.9	9.3	8.1	11.3	9.3	0
2017	7.7	8.1	6.6	5.8	7.2	6.7	11.3	9.3	8.5	6.8	10.5	10.7	0
Average	11.3	11.7	11.2	9.4	11.7	13.4	15.5	15.4	12.1	9.8	11.0	11.2	

*The new PM_{2.5} standard of 12 µg/m³ became effective on March 18, 2013

PM_{2.5} Monthly Averages 5-Year Trend

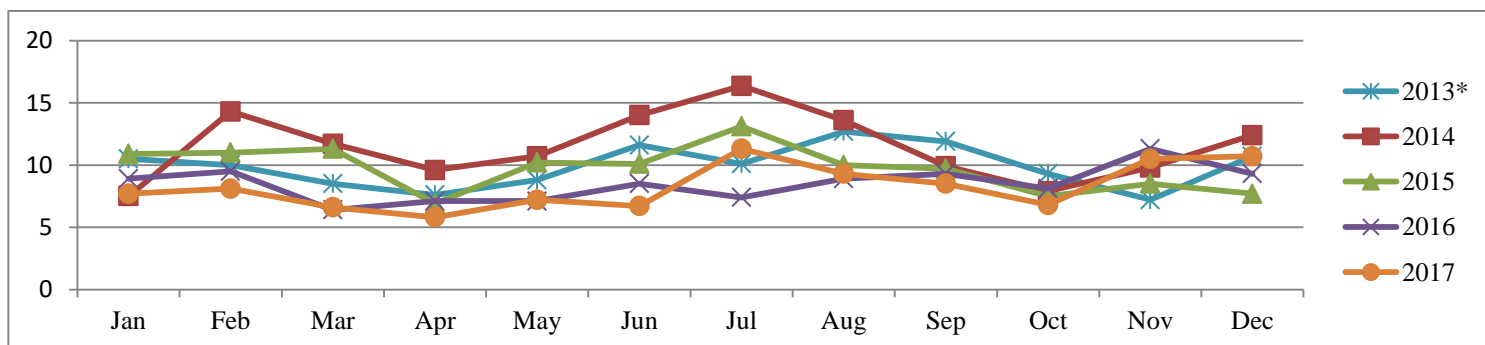

National Ambient Air Quality Standards (NAAQS):

National Ambient Air Quality Standards consist of primary and secondary standards. The primary standards define levels of air quality which EPA judges are necessary, with an adequate margin of safety, to protect the public health. The secondary standards define levels of air quality which EPA judges necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant. For PM_{2.5} the levels of the primary and secondary standards are the same.

National Ambient Air Quality Standard for PM_{2.5} - Annual Standard:

The annual standard is designed to provide an appropriate level of protection from long-term exposure to PM_{2.5}. The standard is met when the annual design value is less than or equal to 12 µg/m³. The standard changed from 15 µg/m³ to 12 µg/m³ on March 18, 2013. The annual design value is calculated by averaging the annual means of 3 consecutive complete years of air quality data. The table below compares data collected from 2011 through year-to-date 2017 to the PM_{2.5} annual standard.

PM_{2.5} Annual Means and Annual Design Values

Site Name	Annual Means µg/m ³							Annual Design Values				
	2011	2012	2013	2014	2015	2016	2017	2011-2013	2012-2014	2013-2015	2014-2016	2015-2017
Southwick	12.1	12.3	12.3	11.2	10.4	8.3	8.3	12.2	11.9	11.3	10.0	9.0
Durrett Lane*	12.3	10.3	10.2	12.0	10.0	9.2	8.9	10.9	10.8	10.7	10.4	9.4
Cannons Lane	13.1	12.3	11.1	11.0	9.5	7.9	7.9	12.2	11.5	10.5	9.5	8.4
Watson Lane	11.9	13.3	12.5	12.2	10.4	8.4	8.1	12.6	12.7	11.7	10.3	9.0

Bold: Design value for Louisville

*Durrett Lane replaced Wyandotte in 2014

National Ambient Air Quality Standard for PM_{2.5} - 24-Hour (Daily) Standard:

The 24-hour standard is designed to provide an appropriate level of protection from short-term exposure to PM_{2.5}. The standard is met when the 24-hour design value is less than or equal to 35 µg/m³. The design value is based on 3 consecutive complete years of air quality data and is calculated by taking the average of the 98th percentile value for each of the 3 years. The 98th percentile value is the 24-hour average out of a year of PM_{2.5} monitoring data below which 98 percent of all 24-hour averages fall. The table below compares data collected from 2011 through year-to-date 2017 to the 24-hour standard for PM_{2.5}.

PM_{2.5} Annual 98th Percentiles and 24-Hour Design Values

Site Name	Annual 98 th Percentile Value µg/m ³							24-Hour Design Values				
	2011	2012	2013	2014	2015	2016	2017	2011-2013	2012-2014	2013-2015	2014-2016	2015-2017
Southwick	29.6	24.1	24.0	24.3	22.3	17.0	17.8	25.9	24.1	23.5	21.2	19.0
Durrett Lane*	26.8	22.1	20.6	26.0	22.1	18.7	20.7	23.2	22.9	22.9	22.3	20.5
Cannons Lane	32.6	23.2	22.5	23.9	21.7	18.7	17.2	26.1	23.2	22.7	21.4	19.2
Watson Lane	31.3	26.3	23.8	26.2	22.8	16.2	17.7	27.1	25.4	24.3	21.7	18.9

Bold: Design value for Louisville

*Durrett Lane replaced Wyandotte in 2014

**Louisville Metro Air Pollution Control District
Air Monitoring Report for Sulfur Dioxide (SO₂)
January 2018**

On June 2, 2010, EPA strengthened the primary National Ambient Air Quality Standard for SO₂. Specifically, EPA replaced the existing annual (30 ppb) and 24-hour (140 ppb) primary standards with a new 1-hour standard set at 75 ppb. The 1-hour standard was set to better protect public health by reducing exposure to high short-term concentrations of SO₂. The new standard took effect August 23, 2010.

Exceedances of the 1-Hour SO₂ Standard:

An exceedance occurs when a measured 1-hour average is greater than 75 ppb. Since up to twenty-four 1-hour averages are recorded each day, multiple exceedances may occur in one day. However, only the maximum 1-hour average (Daily Max) for each day is used in determining if the area is in compliance with the standard. The table below indicates the number of exceedances and the daily maximums reported thus far this year. The data are subject to further quality assurance checks and are not final.

SO₂ Daily Maximums and Exceedances through December 31st

Date	Fire Arms Training		Watson Lane Elementary		Cannons Lane NCore		New Albany Indiana	
	Exceeds	Daily Max	Exceeds	Daily Max	Exceeds	Daily Max	Exceeds	Daily Max
01/07/17		5.5		3.3		8.4		3.4
01/08/17		27.9		6.9		7.0		16.7
02/05/17		4.8		5.7		3.6		5.6
02/13/17		2.6		7.9		1.4		3.3
02/14/17		3.8		7.6		4.7		5.2
03/13/17		2.2		4.9		4.8		0.6
03/14/17		7.3		2.5		0.5		0.8
03/16/17		1.1		2.5		2.5		12.3
03/24/17		2.2		8.3		0.3		3.2
04/04/17		4.9		2.2		1.2		0.6
04/20/17		1.0		3.9		3.2		0.4
04/26/17		1.9		7.2		1.1		4.0
05/02/17		4.2		6.0		1.4		1.4
05/10/17		2.2		13.7		2.1		1.8
05/15/17		3.3		5.6		2.3		4.4
05/15/17		3.3		5.6		2.3		4.4
06/04/17		1.6		1.1		1.3		2.8
06/09/17		0.9		14.0		6.3		1.2
06/21/17		1.8		5.0		11.1		1.0
06/25/17		5.1		1.0		0.6		1.4

**Louisville Metro Air Pollution Control District
Air Monitoring Report for Sulfur Dioxide (SO₂)
January 2018**

Continuation of SO₂ Daily Maximums and Exceedances through December 31st

Date	Fire Arms Training		Watson Lane Elementary		Cannons Lane NCore		New Albany Indiana	
	Exceeds	Daily Max	Exceeds	Daily Max	Exceeds	Daily Max	Exceeds	Daily Max
07/19/17		10.7		1.4		1.5		1.1
07/20/17		3.0		6.3		7.7		0.8
07/21/17		1.5		12.6		5.6		0.9
07/22/17		1.2		3.0		2.4		3.8
08/10/17		8.1		1.9		2.5		1.0
08/17/17		0.6		8.2		2.9		0.8
08/22/17		3.1		4.2		5.2		0.8
08/24/17		1.7		1.2		0.9		1.9
09/25/17		3.1		10.4		0.8		4.3
09/26/17		17.8		3.6		0.7		2.0
09/27/17		7.7		2.5		7.4		1.9
10/04/17		1.7		18.1		2.1		3.0
10/06/17		2.7		3.0		3.7		1.4
10/14/17		4.9		2.3		1.4		2.0
10/26/17		1.3		3.3		0.6		4.4
11/20/17		3.5		6.9		4.5		2.0
11/24/17		1.8		8.1		1.9		2.0
12/02/17		3.2		8.4		1.6		1.9
12/21/17		4.5		2.1		1.9		3.3
12/24/17		4.7		1.4		1.0		1.5
12/29/17		3.0		4.0		4.5		2.2
Totals/Max	0	27.9	0	18.1	0	11.1	0	16.7
99 th Percentile		8.1		12.6		7.4		5.2

*data not available

Attainment of the SO₂ Standard:

Attainment of the new standard is achieved when the 3-year average of the 99th percentile annual distribution of the daily maxima is less than or equal to 75 ppb. Since this value can be calculated from historical data, the chart below indicates those values based on 2011-2017 data.

SO₂ Annual 99th Percentiles and Annual Design Values

Site Name	Annual 99 th Percentiles (ppb)							Annual Design Values				
	2011	2012	2013	2014	2015	2016	2017	2011-2013	2012-2014	2013-2015	2014-2016	2015-2017
Watson Lane *	114	147	93	149	54	26	13	118	130	99	76	31
Fire Arms	35	35	37	42	25	16	8	36	38	35	28	16
Cannons Lane	51	31	27	29	19	8	7	36	29	25	19	11
New Albany	38	32	21	44	26	11	5	30	32	30	27	14

* Watson Lane 2014-2016 design value (DV) was previously reported as 74 ppb. Final quality assured data show the DV is 76 ppb